


DSR35 Series Example - DSR35103


Technical Data	
Application	Hydraulic valves
Model	DSR35103 - 02 DSR35103 - 04
Voltage	12 V 24 V
Nominal Current	1.5 A 0.75 A
Resistance @ 20 deg. C	8.0 Ohms 32.0 Ohms
Nominal Power	18.0 Watts @ 20 deg. C
Duty Cycle	100 %
Total Stroke	3.2 mm Nominal
Holding Force	14.0 N
Ambient Temperature	-30 to 50 deg. C
Pressure Rating	60 Bar
O - Rings	Nitrile
Surface Protection	Zinc & Passivate
Insulation Class	F
Protection Class	IP65
Armature Weight	20.0 g
Total Weight	370.0 g

Optional Features	
Electrical Connections	Flying Lead only
Mechanical Interface	To suit customer specification
Coil Resistance	To suit customer specification

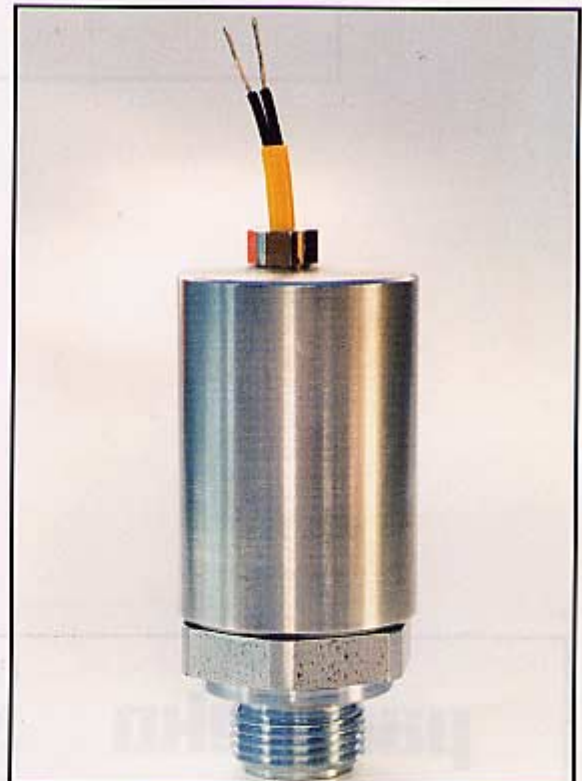

parmeko

DSR35 Series DC On/Off Solenoid

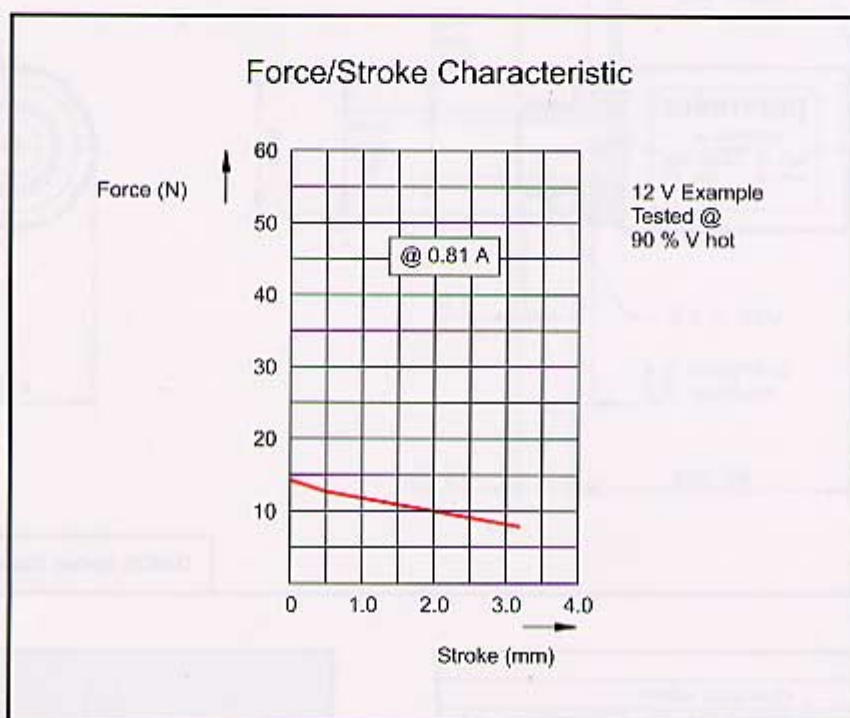

parmeko

Percy Road, Leicester LE2 8FT, England

Telephone: +44 (0) 116 2440044

Facsimile: +44 (0) 116 2440000

E-mail: sales@parmeko.co.uk

Website: www.parmeko.co.uk